DH-XVR5116HE-I3/T

16CH Penta-brid 5MP Value/1080P Mini 1U 1HDD WizSense Digital Video Recorder



Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

The XVR5000-I3/T Series offers powerful recorders that work in conjunction with 1080p HDCVI cameras, delivering smooth and crisp live videos along with an array of advanced security functions. It features two-way talk over coaxial cable, and incorporates AcuPick technology, along with other AI functions, to enhance intelligence and convenience in the surveillance field.

Functions

Two-way talk

Allows for seamless communication between the camera, client and recorder over coaxial cable, and offers instant voice intercom and timely audio alerts.

Enhanced Encoding

Encoding Enhancement mode optimizes videos through real-time encoding to make them smoother and improve scene rendering.

Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database.

*Face Recognition takes effect when Face is selected in AI Mode.

* Dolynk cloud version: DMSS 2.0.30 and above, Dolynk Care 2.50.20 and above.
- 16-channel two-way talk over coaxial cable allows for seamless communication between the camera, client and recorder.
- 2-channel AcuPick for analog channels which improves the efficiency of target retrieval.
- 4-channel perimeter protection for analog channels which supports tripwire and intrusion detection powered by AI.
- 2-channel face recognition for analog channels which supports face comparison.
- 16-channel SMD Plus for analog channels or 24-channel SMD by camera which allows the device to trigger accurate alarms for humans and vehicles.
- 16-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- Supports HDCVI, AHD, TVI, CVBS and IP video input.
- Supports up to 24-channel IP camera input and each channel can be up to 6 MP. The incoming bandwidth reaches 128 Mbps.
- Supports accessing Wi-Fi cameras, making it suitable for a wide range of scenes.
- Smart H.265+ and H.265 dual-stream video compression.



Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

*Perimeter Protection takes effect when IVS is selected in AI Mode.

AcuPick

This industry-leading search technology effectively utilizes back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

*AcuPick takes effect when AcuPick is selected in AI Mode.

SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

*SMD Plus takes effect when SMD is selected in AI Mode.

Technical Specification

System

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI

AcuPick

AcuPick AI by Recorder (Number of Channels)	2 channels

Perimeter Protection

Perimeter Performance AI by Recorder (Number of Channels)	4 channels, 10 IVS rules for each channel

Face Detection

Face Attributes	6 attributes
Face Detection Performance of AI by Recorder (Number of Channels)	2 channels (up to 12 face images/s each channel)

Face Recognition

Face Database Capacity	Up to 10 face databases with 10,000 images
Face Recognition Performance of AI by Recorder (Number of Channels)	2 channels

SMD

SMD Plus by Recorder	16 channels: Secondary filtering for human and vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD by Camera	24 channels

AI Video Quality Analytics

AI Video Quality Analytics by Recorder	16 channels: Supports detecting brightness levels, color cast, defocus, overexposure, contrast levels, black and white

Scene Changing

Scene Changing by Recorder	1 channel

Irregular Black Block Masking

Irregular Black Block Masking by Recorder	1 channel

Audio and Video

Analog Camera Input	16 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
Camera Input	1. CVI: 5 MP@25 fps; 5 MP@20 fps; 5 MP@10/12.5 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@50/60 fps; 720p@25/30 fps; 2. TVI: 5 MP(2560 × 1944)@20 fps; 5 MP(2960 × 1665)@20/25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 3. AHD: 5 MP@20 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps
IP Camera Input	Up to 24 channels of IPC access; 8 IP channels by default + 16 channels (analog channels are converted to IP channels); Incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps; *After IP extension is enabled, Video Quality Analytics, Scene Changing, Face Recognition, Face Detection, Perimeter Protection and AcuPick cannot be used
Encoding Capacity	Encode Enhancement disabled: Main stream: Channels 1-4 5M-N@(1 fps–25 fps), others 5M-N@(1 fps–12 fps); Channels 1-4 4M-N/1080p@(1 fps–30 fps), others 4M-N/1080p@(1 fps–15 fps); 1080N/720p/960H/D1/CIF@(1 fps–30 fps); Sub stream: D1/CIF@(1 fps–15 fps); Encode Enhancement enabled: Main stream: Channels 1-8 5M-N@(1 fps–20 fps), others 5M-N@(1 fps–12 fps); (4 channels can be transformed to 5 MP@6 fps); Channels 1-8 4M-N/1080p@(1 fps–25 fps), others 4M-N/1080p@(1 fps–15 fps); 1080N/720p/960H/D1/CIF@(1 fps–30 fps); Sub stream: D1/CIF@(1 fps–15 fps); *When Encode Enhancement is enabled, Video Quality Analytics, Scene Changing, Face Recognition, Face Detection, Perimeter Protection and AcuPick cannot be used
Dual-stream	Yes
Video Bit Rate	32 kbps–6144 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	1 HDMI, 1 VGA; HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720; VGA: 1920 × 1080, 1280 × 1024, 1280 × 720; It changes to 1920 × 1080, 1280 × 1024, 1280 × 720when Face, IVS&SMD or AcuPick is selected in AI Mode
Multi-screen Display	When IP extension mode not enabled: 1/4/8/9/16; When IP extension mode enabled: 1/4/8/9/16/25
Third-party Camera Access	ONVIF;RTSP;Panasonic;Sony;Axis;Arecont;Hanwha

Compression Standard

Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a;PCM;G.711Mu

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 24.12 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE; Safari; Edge; Firefox

Recording

Record Mode	General;Motion detection;Intelligent;Alarm
Backup Method	USB device and network

Playback Mode	Instant playback;General playback;Event playback;Tag playback;Smart playback

Recording Playback

Recording Playback	1/4/9/16; It changes to 1/4/9 channels when Face or IVS&SMD or AcuPick is selected in AI Mode

Alarm

General Alarm	Motion detection;Local alarm;IPC external alarm;Alarm box;HDCVI alarm;Network alarm;PIR alarm
Anomaly Alarm	Error (no disk; disk error; low space; low quota space; network disconnection; IP conflict; MAC conflict); video loss; video tampering; camera offline
Intelligent Alarm	Face detection;Face recognition;Perimeter protection;SMD Plus
Alarm Linkage	Record; snapshot (panoramic); local alarm output; IPC external alarm output; audio; buzzer; log; preset; email

Ports

Audio Input	16-channel RCA; 16-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
Two-way Talk	Coaxial two-way talk: 16-channel BNC; Local and network user two-way talk: Shares the same audio input with the first channel
Alarm Input	16 channels
Alarm Output	3 channels
Disk Interface	1 SATA port, up to 16 TB. This limit varies depending on the environment temperature
RS-485	1
USB	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)

General

Power Supply	12 VDC, 2 A
Power Consumption	<12 W (without HDD)
Net Weight	1.30 kg (2.87 lb)
Gross Weight	2.11 kg (4.65 lb)
Product Dimensions	325.0 mm × 257.1 mm × 55.0 mm (12.80" × 10.12" × 2.17") (W × D × H)
Packaging Dimensions	374.0 mm × 119.0 mm × 311.0 mm (14.72" × 4.68" × 12.24") (W × D × H)
Operating Temperature	–10 °C to +55 °C (+14 °F to +131 °F)
Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)
Operating Humidity	10%–90% (RH), non-condensing
Installation	Desktop mount
Certifications	CE-LVD: IEC 62368-1:2014; CE-EMC: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 55032:2015+A11:2020, EN 55035:2017+A11:2020, EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014

Ordering Information

Type	Model	Description
DIGITAL VIDEO RECORDER	DH-XVR5116HE-I3/T	16CH Penta-brid 5MP Value/1080P Mini 1U 1HDD WizSense Digital Video Recorder
Accessories (Optional)	DH-NC300	802.11AX 300M WIRELESS ADAPTER
	DH-NC650	802.11AC 650M WIRELESS ADAPTER
	DHI-ARB1606	Alarm Box

Accessories

Optional:



DH-NC300
802.11AX 300M
WIRELESS ADAPTER




DH-NC650
802.11AC 650M
WIRELESS ADAPTER




DHI-ARB1606
Alarm Box

Dimensions (mm[inch])

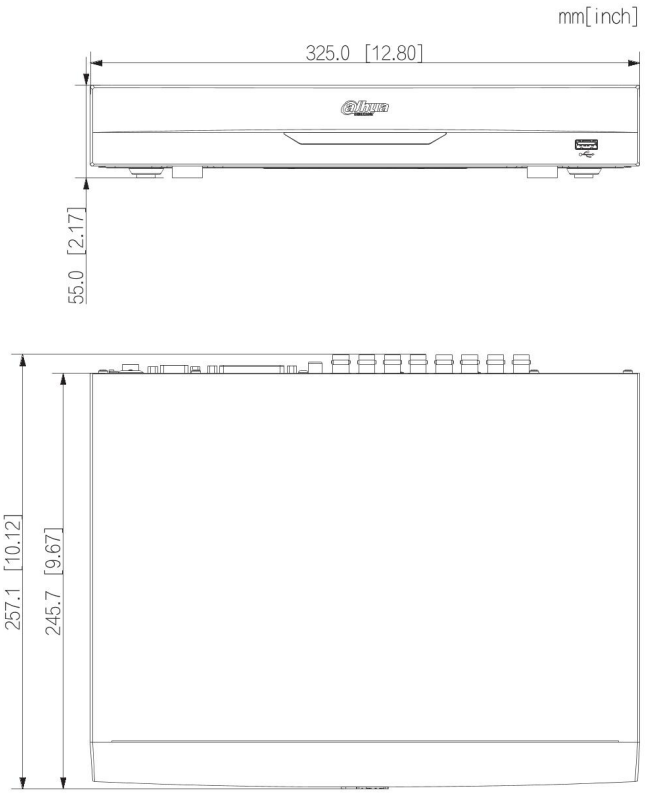

Panels

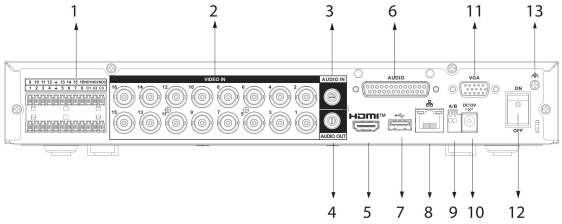

1	Alarm In/Out	2	VIDEO IN
3	AUDIO IN, RCA Connector	4	AUDIO OUT, RCA Connector
5	HDMI Port	6	DB–25 Port
7	USB Port	8	Network Port
9	RS–485 Port	10	Power Input
11	VGA Port	12	Power Switch
13	Ground		

©2026 Dahua. All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.